


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B22D 41/015, 41/62	A1	(11) International Publication Number: WO 00/45980 (43) International Publication Date: 10 August 2000 (10.08.00)
(21) International Application Number: PCT/SG00/00012 (22) International Filing Date: 31 January 2000 (31.01.00) (30) Priority Data: 9900057-2 2 February 1999 (02.02.99) SG (71) Applicant (for all designated States except US): SINGAPORE POLYTECHNIC [SG/SG]; 500 Dover Road, Singapore 139651 (SG). (72) Inventor; and (75) Inventor/Applicant (for US only): LOH, Peng, Chum [SG/SG]; 500 Dover Road, Singapore 139651 (SG). (74) Agent: LEE, Ai, Ming; Rodyk & Davidson, 9 Raffles Place, #55-01 Republic Plaza, Singapore 048619 (SG).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: METAL CASTING**(57) Abstract**

Metal casting apparatus (10) comprises a tungsten inert gas (TIG) hand torch (12), a graphite crucible (14) and a graphite mould (16). Energised by a high frequency alternating current by supply (30), the torch (12) produces a pulsating arc within an inert gas shield (22). The arc melts metal (28) in the crucible (14), and cleaning of the molten metal is achieved by superimposing a positive DC bias on the alternating current. Different metals may be alloyed, with homogeneity resulting from agitation and stirring the molten metal. The molten metal is poured into mould (16) through conduit (24) by opening tap rod (26).

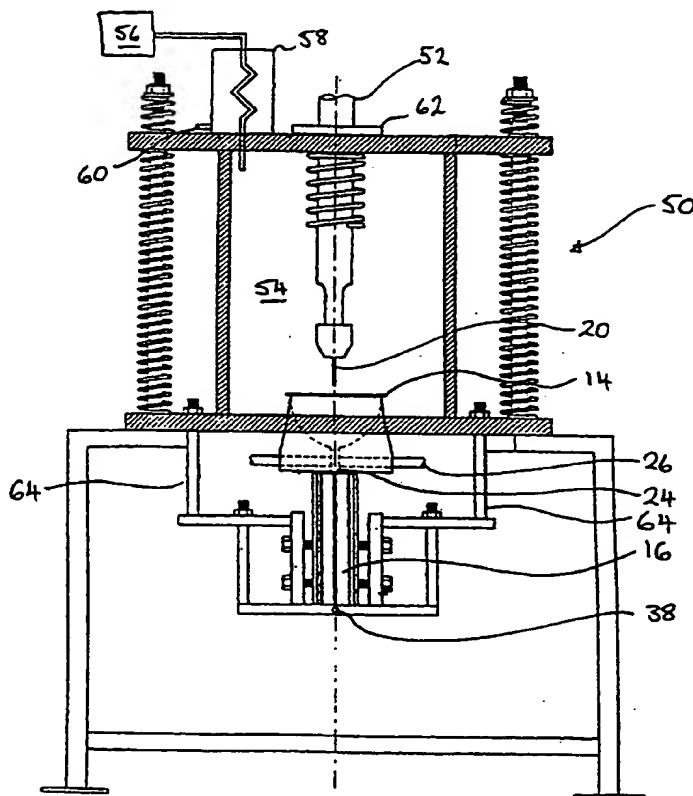

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5

METAL CASTING

10 The present invention relates to a method and
apparatus for producing a metal casting, particularly but
not exclusively for the jewellery industry.

 There are many different kinds of casting processes,
but not all are suited to the high standards required by
15 the jewellery industry. Investment casting and centrifugal
casting are two procedures which have been widely used to
produce jewellery because castings with precise dimensions
and good surfaces are achievable. However, even with these
procedures there are problems, for example porosity and
20 other defects arising in castings due to surface tension
phenomenon and the decomposition of the mould materials.
Although advanced casting techniques such as computer
controlled 'pressure over vacuum' castings have the
potential to overcome certain problems, they are relatively
25 expensive and in any event are not suitable for the more
reactive jewellery compositions.

 An object of the present invention is to provide a
method and apparatus which is capable of overcoming or at

least ameliorating some of the difficulties encountered especially in the jewellery industry when casting using conventional processes and apparatus.

In accordance with a first aspect of the present invention, there is provided a method for producing a metal casting, comprising: providing a metal in a crucible; melting the metal in the crucible under an inert atmosphere using an arc from an electrode; and releasing the molten metal into a mould.

10 The arc may produce a plasma temperature of around 10,000°C, and is thus able to heat the metal very rapidly and at least to a degree sufficient to melt all metals.

The metal in the crucible may comprise at least two parts of different compositions. For example, one part may 15 comprise a gold-rich alloy and another part may comprise an aluminium-rich alloy. The two parts may be alloyed together in the crucible. Alloying *in situ* may require stirring the molten metal in the crucible to give a homogenous melt. Stirring may be achieved by establishing 20 relative movement between the arc and the crucible, possibly by oscillating the electrode. Preferably, the electrode does not contact the molten metal.

The molten metal may also be agitated in the crucible by supplying to the electrode a pulsating alternating 25 current of varying frequency, e.g., 0-50 HZ. Such current agitation encourages homogeneity in the molten metal. It may be advantageous to superimpose a direct current bias to the alternating current in order to shift the balance. By

adding a positive direct current bias, the arc is predominantly positive which may clean the molten metal. Such electric cleaning (ion-bombardment) enables use of materials with inherent oxides, for example aluminium alloy. It could also be used to recycle contaminated old jewellery. Alternatively, by introducing a negative direct current bias, the arc will predominantly be negative which may give rise to greater heating of the metal in the crucible.

10 The method for producing a metal casting may further comprise varying the pressure of the inert atmosphere during melting. By exerting positive or negative gas pressures on the molten metal, it is possible to lower surface tensions or remove trapped gases. During use of
15 negative gas pressures to remove trapped gases, it is desirable to remove evolving vapours possibly by maintaining a supply of inert gas to purge the inert atmosphere around the molten metal. In addition to exerting a positive pressure on the molten metal, a
20 negative pressure (suction) may be applied to the mould during pouring of the molten metal. Such a pressure differential may encourage molten metal flow from the crucible to the mould.

According to a second aspect of the present invention,
25 there is provided apparatus for producing a metal casting, comprising a crucible, means for establishing an inert atmosphere around metal in the crucible, an electrode, means for supplying electricity to the electrode to

generate an arc for melting metal in the crucible, and a mould for receiving molten metal from the crucible.

The inert atmosphere establishing means may simply comprise a flow of inert gas directed from the electrode 5 towards metal in the crucible. The flow should be sufficient to establish an inert gas shield around metal in the crucible and preferably from the electrode to metal in the crucible. Alternatively, the inert atmosphere establishing means may include a pressure chamber in which 10 the electrode and metal in the crucible are located. The pressure chamber enables the pressure of the inert atmosphere to be decreased for removing trapped gases in the molten metal, and subsequently increased to lower molten metal surface tension. The pressure chamber may 15 have means for changing the inert atmosphere without altering gas pressure in the pressure chamber. For example, an outgoing flow of inert gas contaminated with vapours evolved from the molten metal may be matched by an incoming flow of uncontaminated inert gas.

20 The apparatus may further comprise a conduit communicating between the crucible and the mould, and having a valve for regulating molten metal flow through the conduit. The apparatus may be arranged with the crucible above the mould so that molten metal flow through the 25 conduit is aided by gravity, the molten metal flow through the conduit may further be encouraged by establishing a pressure differential across the valve. For example, a vacuum pump may be used to lower gas pressure in the mould

prior to opening the valve.

The crucible or the mould may be of graphite. A graphite crucible would be able to carry a high current and at the same time additional heating and subsequently some cooling by thermal conduction would be possible. By the same token, a graphite mould would facilitate preheating of the mould before molten metal is introduced into it. The graphite mould may be heated by electric heating elements. Graphite is much less reactive than certain other mould materials, and thus is compatible with the more reactive jewellery compositions.

Other features of both aspects of the present invention are set out in the appended dependent claims, to which reference should now be made.

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic showing manual apparatus embodying the present invention; and

Figure 2 is a section of automated apparatus embodying the present invention.

Figure 1 shows schematically manual apparatus 10 for producing cast jewellery, comprising a tungsten inert gas (TIG) hand torch 12, a graphite crucible 14, and a graphite mould 16. The TIG hand torch 12 has a tungsten electrode 20 which produces an arc (not shown) within an inert gas shield 22 when supplied with high frequency alternating current. The inert gas shield 22 is provided by a flow of

inert gas directed through the TIG hand torch 12 and beyond the electrode 20. The graphite crucible 14 communicates with the mould 16 through conduit 24 when opened by graphite tap rod 26.

5 A metal sample 28 to be cast, or a mixture of metal samples 28 to be alloyed and then cast, are placed in the crucible 14. The tap rod 26 is positioned to seal off the conduit 24, blocking communication between the crucible 14 and the mould 16. The TIG hand torch 12 is energized by
10 the high frequency alternating current supply 30. The arc thus generated strikes the sample(s) 28 and rapidly produces molten metal. The molten metal is agitated by pulsing of the arc caused by the alternating current. The balance of alternating current is adjusted by superimposing
15 a direct current supply 32. The DC supply 32 may be switched between positive and negative, to make respectively the alternating current supplied to the electrode 20 either predominantly positive or predominantly negative. The molten metal is further agitated by a
20 stirring action imparted by oscillating the TIG hand torch 12; the electrode 20 does not contact the molten metal.

The graphite mould 16 is preheated by heating elements 34. The pressure of gas in the mould 16 is reduced by a vacuum unit 36 which withdraws gas through suction hole 38.
25 When the molten metal is ready for casting, tap rod 26 is moved to allow molten metal to flow through conduit 24 into the mould 16 where it is allowed to cool.

Figure 2 shows a section of an automated jewellery

casting apparatus 50. Features of the apparatus 50 which are in common with the manual apparatus 10 of figure 1 have been given the same reference numerals. In the apparatus 50, the tungsten electrode 20 of a pulsating arc torch 52 and the crucible 14 are mounted in a pressure chamber 54 which is connected to vacuum pump 56 through coolant unit 58. The pressure chamber 54 is supplied with inert gas through supply hose 60.

The pulsating arc torch 52 is connected to a motorised 10 cam which in use causes the electrode 20 to oscillate in such a way that stirring of molten metal in the crucible 14 is achieved. The separation of the electrode 20 from the crucible 14 is varied by adjusting the length of support struts 64.

15 The operating procedure of the automated jewellery casting apparatus 50 will now be described:

- 1) Alloying elements are placed in the graphite crucible 14.
- 2) The pressure chamber 54 is sealed.
- 20 3) The graphite mould 16 is preheated (the graphite crucible 14 may also be preheated).
- 4) The pressure chamber 54 is purged with argon inert gas.
- 5) The pressure of the gas in the pressure chamber
- 25 54 is reduced.
- 6) The gas pressure in the pressure chamber 54 is balanced at between 10 and 10^{-1} torr, with the graphite mould 16 at about 300°C .

- 7) The AC pulsed arc (argon-tungsten) is started using the high frequency supply.
- 8) The motorised cam 62 is started to oscillate the torch 52.
- 5 9) The alloying elements are melted in the crucible, cleaned using the predominantly positive (DC biased) arc using ion bombardment to break up intermetallic oxides and the like, and homogenized by stirring and agitating.
- 10 10) In the negative-pressure argon atmosphere of the chamber, impurities and oxides of the alloying elements are transformed into vapours and removed by continuous action of the unit 56.
- 15 11) The purified and homogenized molten alloy is then cast into the graphite mould 16 (pre-purged with inert argon). To improve molten metal flow into the mould 16, the pressure in the chamber 54 is increased and at the same time, the pressure in the mould 16 is decreased by suction through hole 38.
- 20 12) The cast metal is allowed to cool.

CLAIMS

1. A method for producing a metal casting, comprising:
providing a metal in a crucible;
5 melting the metal in the crucible under an inert atmosphere using an arc from an electrode; and
releasing the molten metal into a mould.
2. A method for producing a metal casting according to claim 1, in which the metal provided in the crucible
10 comprises at least two parts of different compositions.
3. A method for producing a metal casting according to claim 1 or 2, further comprising stirring the molten metal in the crucible.
4. A method for producing a metal casting according to
15 claim 3, in which the molten metal is stirred by establishing relative movement between the arc and molten metal in the crucible.
5. A method for producing a metal casting, in which the relative movement is established by oscillating the
20 electrode.
6. A method for producing a metal casting according to any one of the preceding claims, further comprising agitating the molten metal in the crucible by supplying a pulsating alternating current to the electrode.
- 25 7. A method for producing a metal casting according to claim 6, in which the pulsating alternating current is of varying frequency.
8. A method according to claim 6 or 7, further

comprising superimposing a direct current to alter the balance of the alternating current.

9. A method according to claim 8, in which a positive direct current is superimposed for cleaning the molten metal.

10. A method according to any one of the preceding claims, further comprising varying the pressure of the inert atmosphere during melting.

11. A method according to any one of the preceding claims, further comprising heating the mould prior to pouring the molten metal.

12. A method according to any one of the preceding claims, further comprising introducing a pressure differential between the crucible and the mould to encourage molten metal flow from the crucible to the mould when pouring commences.

13. An item of jewellery cast in accordance with any one of claims 1 to 12.

14. Apparatus for producing a metal casting, comprising a crucible, means for establishing an inert atmosphere around metal in the crucible, an electrode, means for supplying electricity to the electrode to generate an arc for melting metal in the crucible, and a mould for receiving molten metal from the crucible.

15. Apparatus according to claim 14 further comprising means for stirring molten metal in the crucible.

16. Apparatus according to claim 15, in which the stirring means establishes relative movement between the

arc and molten metal in the crucible.

17. Apparatus according to claim 16, in which the stirring means comprises drive means for oscillating the position of the electrode.

5 18. Apparatus according to any one of claims 14 to 17, in which the electricity supply means supplies high frequency alternating current to the electrode.

19. Apparatus according to claim 18, further comprising means for superimposing a direct current to alter the
10 balance of the alternating current.

20. Apparatus according to any one of claims 14 to 19, further comprising means for varying the pressure of the inert atmosphere established.

21. Apparatus according to any one of claims 14 to 20,
15 further comprising a conduit communicating between the crucible and the mould, and having a valve for regulating molten metal flow through the conduit.

22. Apparatus according to claim 21, further comprising means for establishing a pressure differential across the
20 valve for urging molten metal flow through the conduit when the valve is open.

23. Apparatus according to claim 22, in which the pressure differential establishing means comprises suction means for reducing gas pressure in the mould.

25 24. Apparatus according to any one of claims 14 to 23, in which the electrode is a tungsten electrode.

25. Apparatus according to 24, in which the tungsten electrode is part of a tungsten arc torch.

1/2

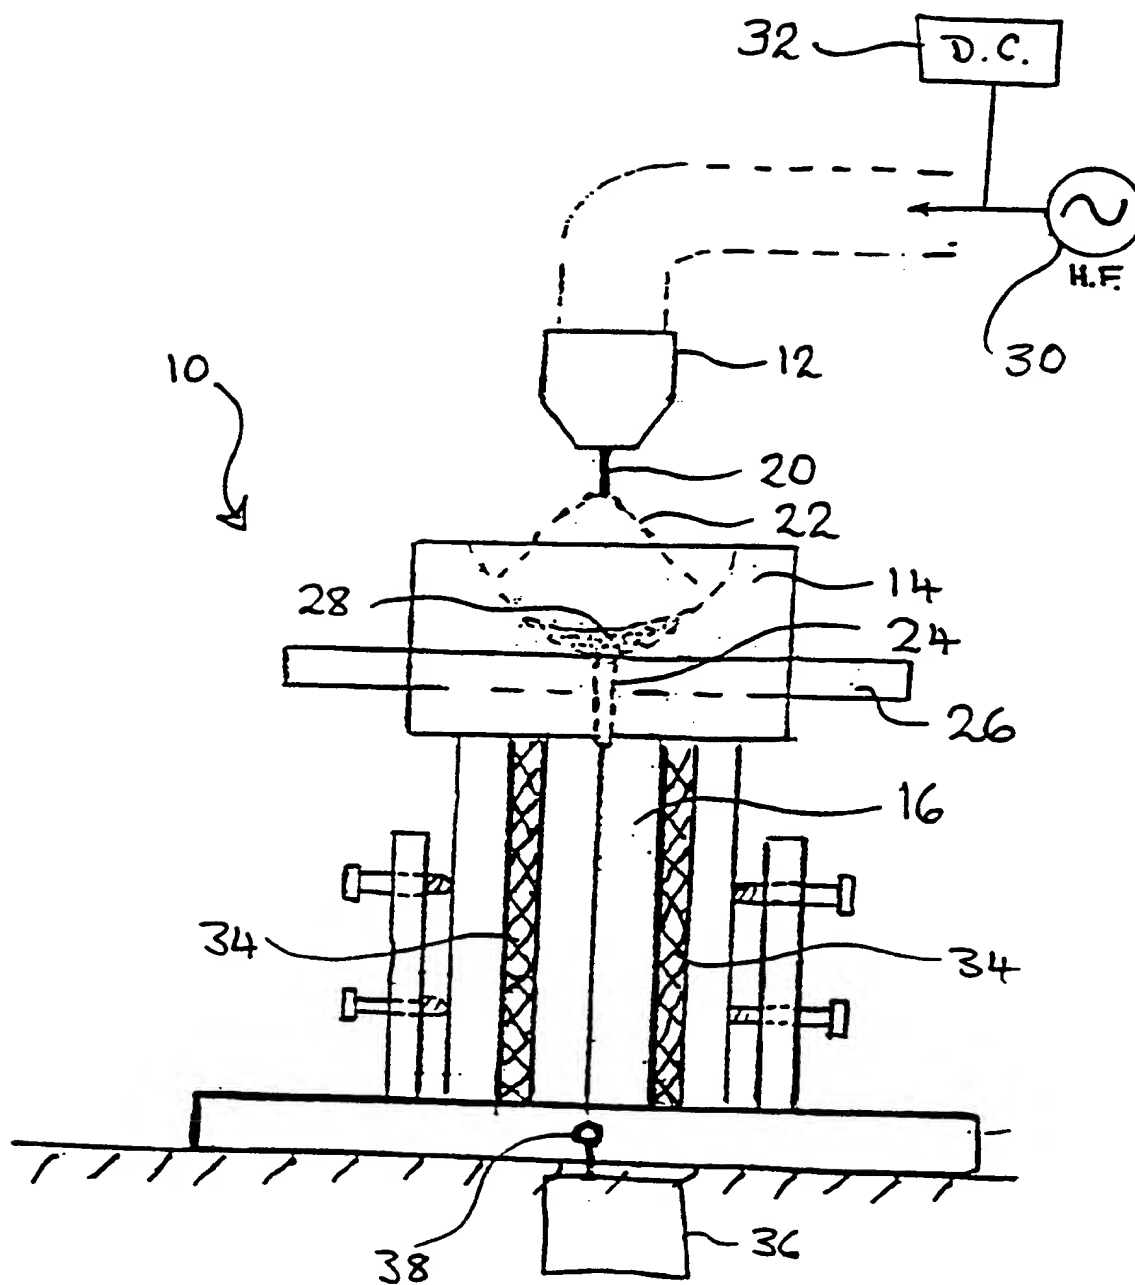


FIGURE 1

2/2

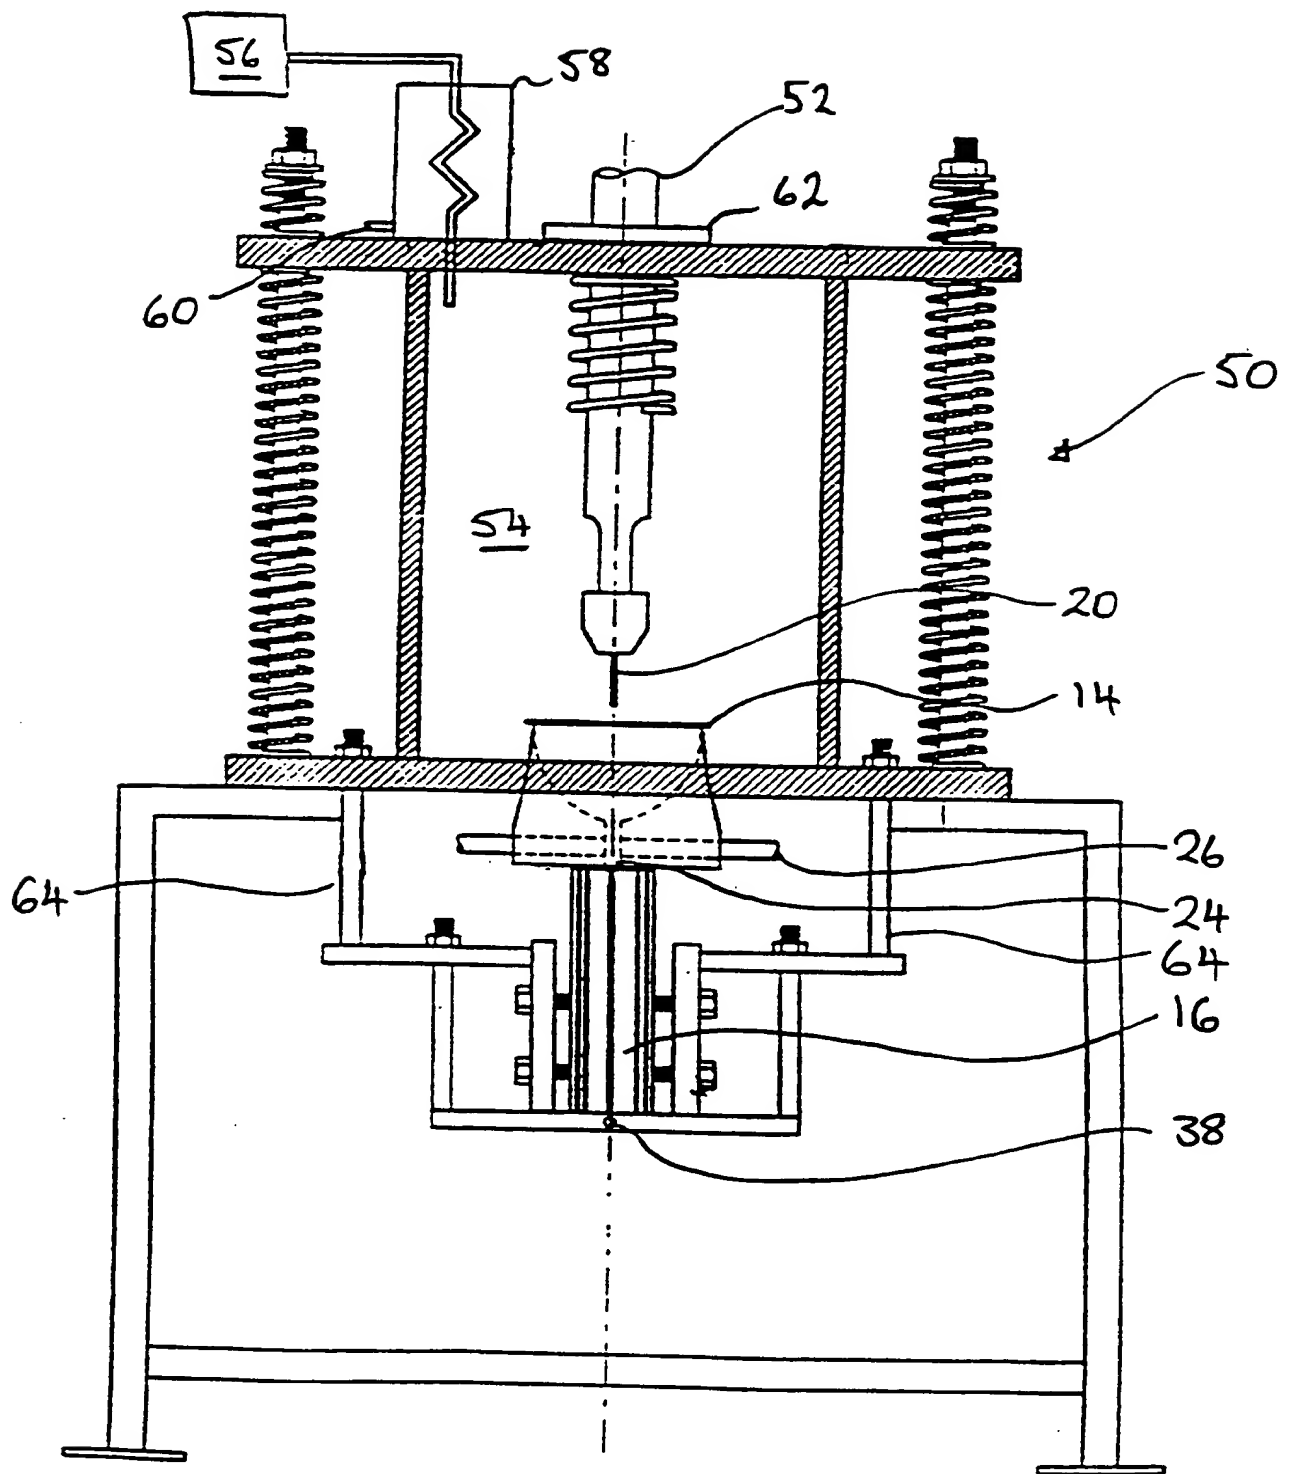


FIGURE 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SG00/00012

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. ⁷: B22D 41/015, 41/62

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B22D 41/--, 1/00, 23/00, B01F/--

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
dwpi : (electrod+ or arc), (stir+ or agitat+ or mix+) & (crucibl+ or ladl+)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Patent Abstract of Japan, JP 63-144855 A (NIPPON KOKAN KK) 17 June 1988 & JP 63-144855 A	1-3, 6-8, 14-15, 18-19, 26
X	EP 18450 A1 (IWATANI SANGYO KK) 12 November 1980 See page 1 line 4, page 2 lines 26-28, page 4 lines 11-19, page 11 lines 9-12.	1-2, 10-14, 20-23, 27, 29-31
X Y	GB 1035875 A (INTERNATIONAL BUSINESS MACHINES CORPORATION) 13 July 1966	1-5, 14-17, 24-26 6-7, 18
X	US 5846287 A (KUMAR et al.) 8 December 1998	1-3, 6, 14-15, 18

☒ Further documents are listed in the continuation of Box C ☒ See patent family annex

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search

15 May 2000

Date of mailing of the international search report

24 MAY 2000

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaaustralia.gov.au
Facsimile No. (02) 6285 3929

Authorized officer

R.P. ALLEN
Telephone No : (02) 6283 2134

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG00/00012

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4670884 A (LETIZIA et al.) 2 June 1987 See column 1 lines 13-19, column 2 lines 11-17.	1-5, 14-18
X Y	US 3683094 A (SCHLIENGER) 8 August 1972 See abstract, figure 1.	1-5, 14-17 6-7, 18
X Y	US 4700769 A (OHARA et al.) 20 October 1987 See column 4 lines 8-31, Figure 4.	1-5, 14-17 6-7, 18
X	Derwent Abstract Accession No. 18928W/11, Class M24, RU 429099 A, (CHELYABINSK METALLURG WK) 15 October 1974	1-5, 14-17
X Y	US 4110546 A (STENKVIST) 29 August 1978	1-4, 14-16 6-7, 18
X	US 5168917 A (OKUDA et al.) 8 December 1992	1-2, 10-12, 14, 20-22, 24-25
X	Patent Abstract of Japan, JP 56-151162 A (NAKASEKO ISAO) 24 November 1981 See abstract and figures.	1-2, 5, 14, 26
Y	US 4572673 A (PORTER et al.) 25 February 1986	6-7, 18
P,X	US 5963579 A (HENRYON) 5 October 1999	1-3, 14-15, 25
P,X	US 5956366 A (SHIMIZU et al.) 21 September 1999	1-3, 14-15, 26

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/SG00/00012

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member					
US	5846287	AU	74091/94	CN	1128546	EP	713537
		US	5411611	WO	9504836		
US	4670884	EP	183654	IT	1208697		
US	3683094	NONE					
US	4700769	NONE					
US	4110546	DE	2648575	FR	2331233	GB	1557571
		JP	52060455	JP	61001990	SE	7512428
US	5168917	DE	4116071	FR	2662072	GB	2244020
		JP	4022564				
US	4572673	BR	8300696	CA	1220622	EP	86637
		ES	519736	ES	8405654	GB	2114907
		IN	158301	JP	58199651	ZA	8300844
US	5963579	BR	9803140	CA	2243523	EP	897770
		FR	2767081				
US	5956366	NONE					
END OF ANNEX							